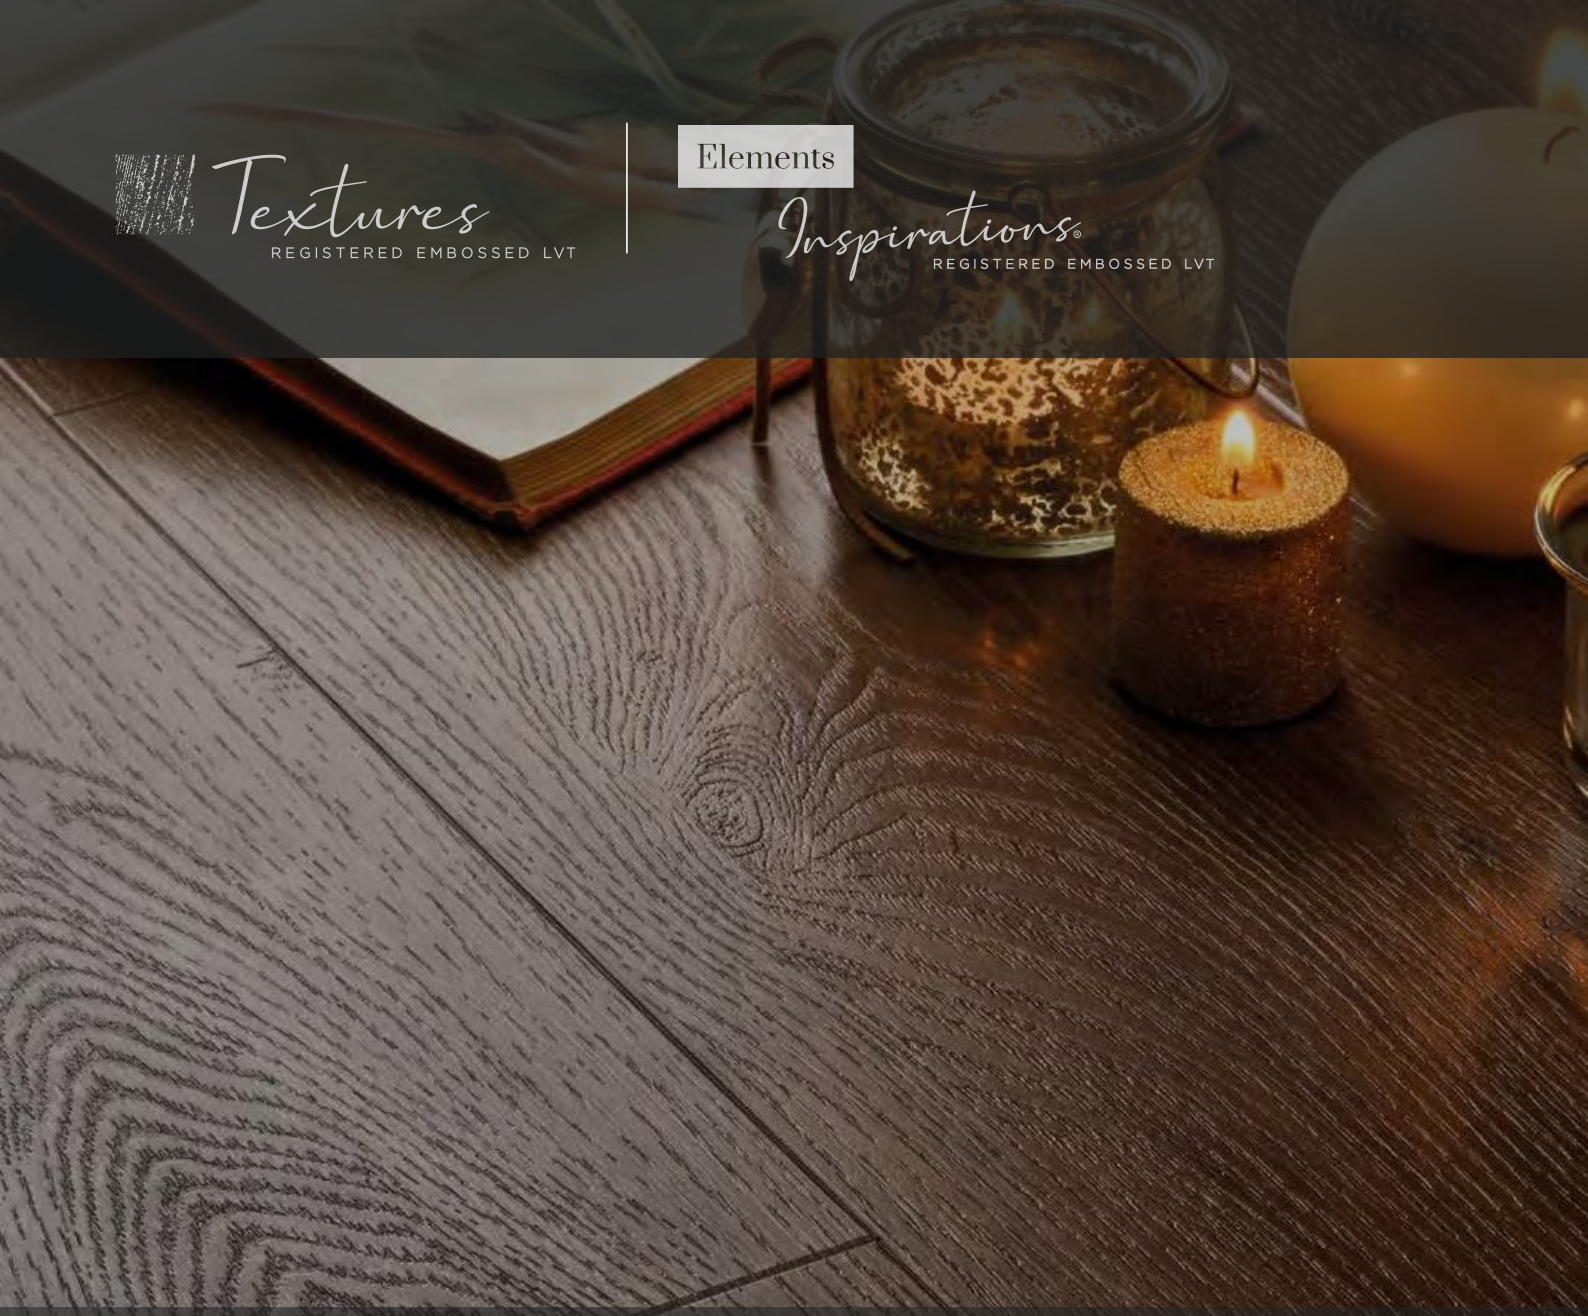


Textures
REGISTERED EMBOSSED LVT

Elements
Inspirations®
REGISTERED EMBOSSED LVT

THE FLOOR CARE GUIDE

Care & maintenance

For Textures and Elements Inspirations luxury vinyl tile flooring.

Simple habits. Beautiful floors for years to come.

A little care goes *a long way.*

Textures and Elements Inspirations LVT are made for real life. Regular, gentle cleaning removes the grit and everyday marks that can dull a floor over time, helping preserve its natural matt appearance and realistic finish.



RECOMMENDED CLEANER

Textures Floorcare

A concentrated, neutral pH everyday cleaner suitable for both LVT ranges. Use the dilution on the current bottle label.

Available via Textures and Elements Inspirations retailers.



Neutral pH / No residue

The everyday routine

A gentle routine is all that is needed for normal day-to-day care.

01

Remove loose dirt and grit

Sweep with a soft brush or vacuum using a clean hard-floor setting or soft head.

02

Dilute Textures Floorcare

For light to medium soiling, add 30–50 ml to 5 litres of clean water. If the label on your bottle differs, follow the bottle.

03


Clean evenly

Apply with a clean microfibre or spray mop. Wring it out well, spread the solution evenly and never flood the floor.

04

Remove residue and allow to dry

Wipe or rinse with a clean, damp mop or cloth. Let the floor dry fully before walking on it.

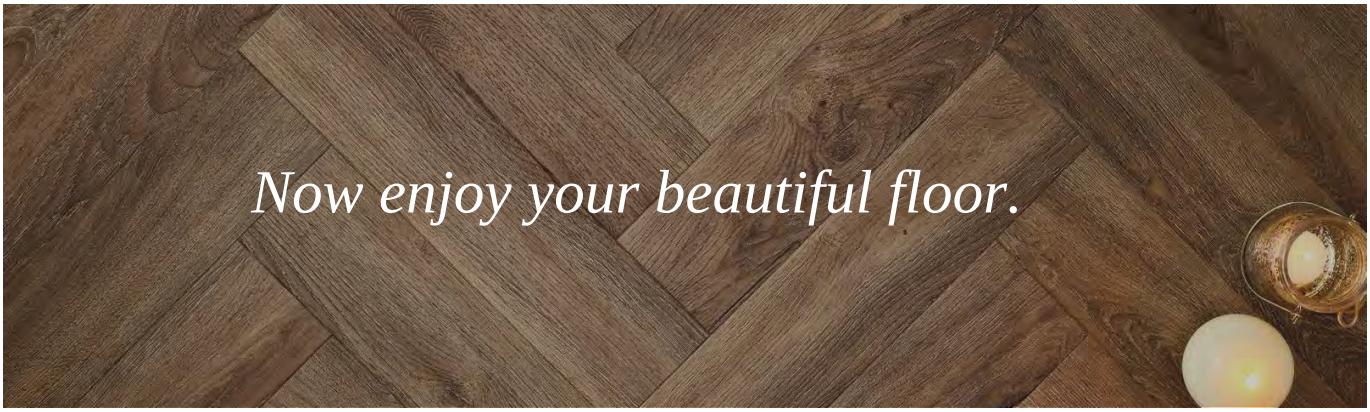

The details make *the difference.*

A little prevention keeps everyday wear under control.

SPILLS

Mop up promptly, especially stain-forming or aggressive substances, to reduce slip risk, staining and long-term damage.

STUBBORN MARKS

Use the heavier-soiling dilution on the current Textures Floorcare label. Work gently with a non-abrasive cloth or pad, then wipe clean.

ENTRANCES

Use walk-off mats at entrances to catch water, grease, sand and grit. Choose colourfast, non-staining mats confirmed suitable for LVT.

FURNITURE

Lift rather than drag heavy items. Use hardboard or plywood and a hand dolly when moving appliances; fit clean felt pads or wide protectors afterwards.

CASTORS

Use undamaged Type W castors on roller chairs and wide cups beneath heavy furniture or narrow legs.

REGULAR CARE

Sweep or vacuum regularly. Loose grit can act like sandpaper and create fine scratches.

CLEANERS

Avoid bleach-based, abrasive, solvent, strongly acidic or strongly alkaline products unless specifically approved for LVT.

STREAKS

Streaks often mean too much cleaner or residue. Wipe with clean water, use a fresh mop and reduce the dose next time.



Protect your floor.

Small details make a big difference.

01

FURNITURE & HEAVY ITEMS

Fit felt pads or wide protectors and inspect them regularly. Lift heavy objects; do not slide them across the floor.

02

MATS & RUGS

Use colourfast, non-staining products confirmed suitable for LVT by their manufacturer. Avoid unverified backings that may react with vinyl.

03

SUNLIGHT & HEAT

Use curtains, blinds or UV film during strong sunlight to reduce discolouration and heat buildup. Move loose rugs and furniture occasionally so the floor ages evenly.

Clean protective pads and castors regularly. Trapped grit can scratch the floor.

Good to know

The important technical details for both LVT ranges.

WATER RESISTANCE

Both ranges withstand everyday spills and short accidental water exposure, such as an appliance leak. Clean up promptly. Extended flooding or immersion may cause layers to delaminate. Neither range is suitable for wetroom installations.

THE FIRST SEVEN DAYS

Do not wet-wash, scrub or strip the floor for at least seven days after installation. Dry sweeping or vacuuming is suitable during this period.

TEMPERATURE & UFH

Keep the installed floor between 12–27°C and the adhesive-line/subfloor temperature at or below 27°C during UFH operation. After installation, allow 24 hours before raising heat gradually by 3–5°C per day. Follow the installation guidance for your floor and heating system.

Please avoid

- × Steam cleaners
- × Abrasive pads or powders
- × Solvent-based products
- × Strong acids or alkalis
- × Excess or standing water
- × Dragging heavy items
- × Unverified mat backings

Steam can delaminate the layers and is not covered by the warranty.

If you are unsure whether a cleaner, mat, rug or accessory is suitable, check with its manufacturer before use.